

TR-7619 Jumbo




Thomas Regout International B.V. offers a broad range of linear motion solutions that help move your application in any direction: horizontal, vertical or diagonal.

Challenge us, in any way. We will present an innovative and integrated total solution, completely adapted to your specific needs and demands. In our own R&D department we design innovative sliding and linear motion systems. Incorporating the highest ISO international and environmental standards that ensure that our products and services are safe, reliable, sustainable and of high quality.

TR-7619 Jumbo

The TR-7619 Jumbo slide is positioned above our heavy duty slides the ULF HD, Titan and Condor. This roll formed, extra heavy duty slide exceeds a load capacity of 300 kg with a minimal deflection. The product offers the highest degree of rigidity, robustness and includes high quality components to guarantee a long life cycle. This slide is up to 1500 mm length available from stock, with several features like a lock-in, lock-out and & front release. Custom made slides can be produced up to 2000 mm in length with customer specific requirements in coating, length, extension, features and mounting possibilities. These features are redesigned to operate in vertical direction. Thanks to its robustness the new lock in and lock out features can be used in heavy duty applications.

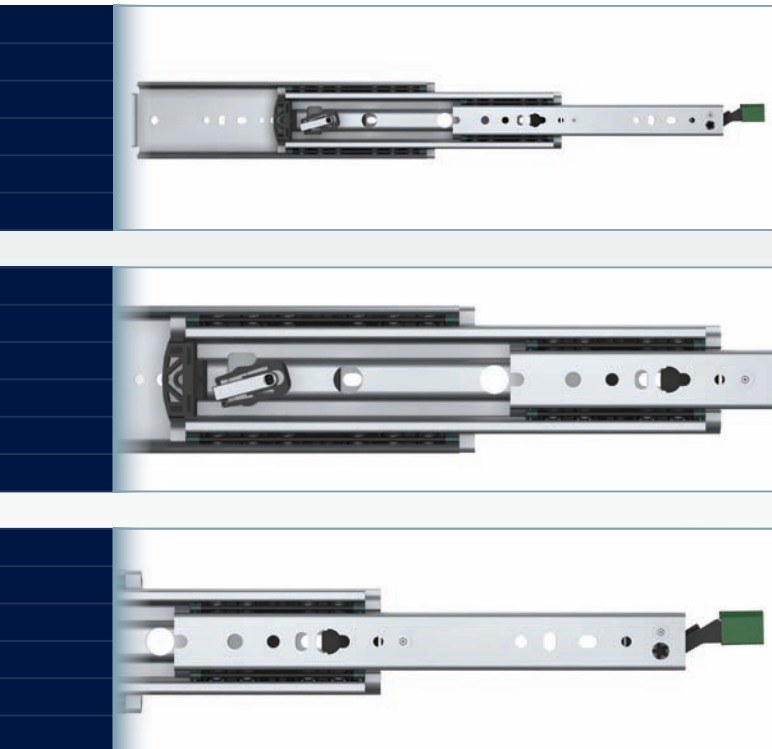


* pictures are in concept

features and benefits

- 1 Extreme robustness and rigidity
- 2 Over 300 kg load capacity (10.000 cycles)
- 3 Improved lock in / lock out feature
- 4 Fast delivery
- 5 Slide length ranges from 300 mm up to 2000 mm
- 6 Standard slide lengths available from stock (from 300 mm up to 1500 mm)
- 7 Custom made slides
- 8 Ball cage connectors to avoid ball cage migration
- 9 Patented Modular design ball cage
- 10 Up to 120 hours corrosion resistance
- 11 Customized mounting possibilities
- 12 Smooth movement



Technical specifications

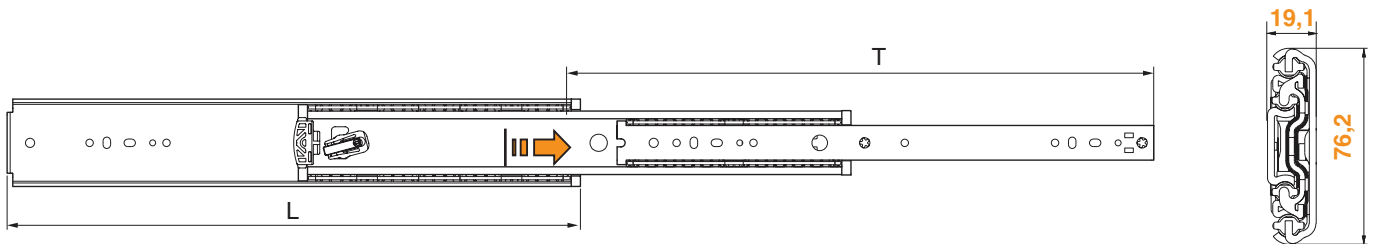

TR-7619 Jumbo

Width	76,2 mm
Thickness	19,1 mm
Lenght (L)	300-2000 mm
Travel (T)	From 50% up to 130% over extension
Load capacity	>300 kg
Fixation	Countersunk and Pan head screws are possible (M5-M6)
Other	Minimal deflection
Optional features	Front operated lock in Front operated lock out Manual lock out (without front release)





Thomas Regout International B.V.

Industrieweg 40
6219 NR Maastricht
The Netherlands

T. +31 (0)43 351 66 66
F. +31 (0)43 351 66 99

E. sales@thomasregout.com

www.thomasregout.com

